

# MIX series I/O

The product group of I/O modules of the MIX series has been designed for building distributed control systems using JACE or AAC20 devices.


In order to ensure high versatility and price performance, all the MIX Series modules have been equipped with the most commonly used types of I/O in building automation (MIX of all types of I/O in one unit).

In order to meet the tight market requirements, the modules are factory-equipped with the two most popular open communication protocols: Modbus (ASCII, RTU, TCP/IP) and BACnet (MSTP, IP), which are selected using DIP switches. There are two versions of the modules, namely: modules with interface RS485, and modules with interfaces 2x Ethernet and RS485. Devices with interfaces 2x Ethernet and RS485 have the added functionality of "Modbus Gateway TCP/IP to Modbus ASCII/RTU", enabling you to connect additional modules / devices that communicate via Modbus RS485. One major advantage of supporting our modules with open communication standards is the versatility to install them in both new and completed installations, as part of an existing BMS.

To even further increase the versatility, all relay modules allow direct control of any system components supplied with 230 VAC (max. 3A). As it does not require the use of additional relays, it thereby leads to considerable savings. Addressing the modules is via rotary switches, which facilitates and accelerates the process of commissioning the system. Built-in mini USB allows for initial configuration of the unit without power supply.

## Key Features

- A large number of all types of I/O
- All digital inputs work as fast counters up to 100 Hz
- Universal inputs have 16-bit resolution which increase the accuracy of measurement
- Wide range of supported temperature sensors (NTC, PT1000 etc.)
- Automatic detection of the signal type in the case of universal inputs
- Digital outputs 230 VAC max. 3A allow direct control without additional relays
- Analog output with max. 20mA load allow direct control of relays (12 VDC) or SSR with PWM support
- LEDs indicate the status of inputs and outputs
- Supports open standards: BACnet and Modbus
- RS485 communication port, half duplex
- 2 x Fast Ethernet with built in switch
- Built in Modbus Gateway TCP/IP to RS485
- Simple and fast addressing from 1 to 99

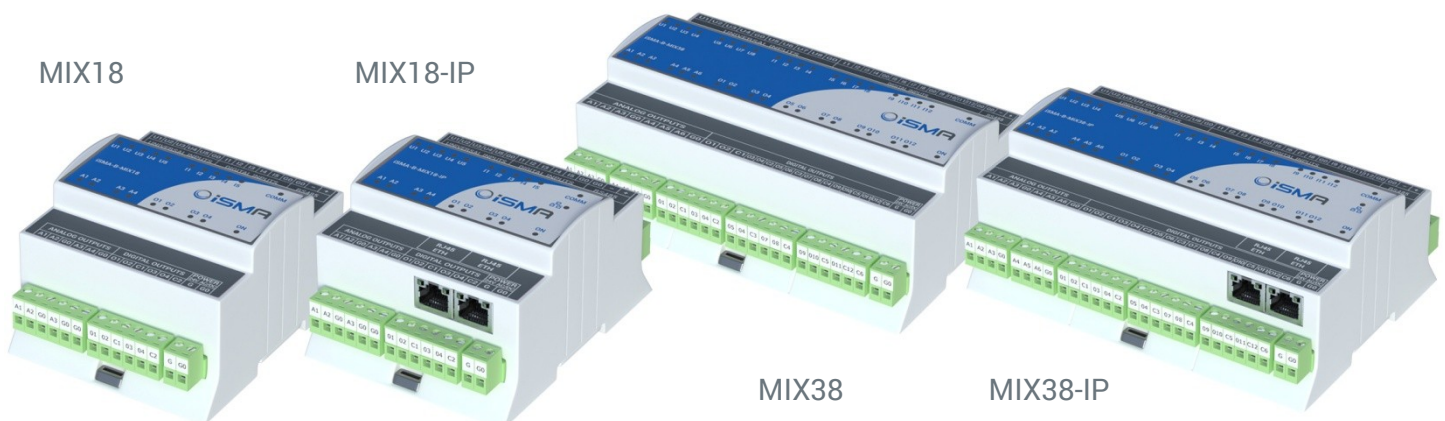

# MIX series I/O

## Specification

### Universal Inputs (UI)

All universal inputs have 16-bit resolution which support the following types of inputs:

- Temperature input support the following types of sensors: 10K3A1, 10K4A1, Carel 10K, 20K6A1, 2.2K3A1, 3K3A1, 30K6A1, SIE1, TAC1, SAT1, Pt1000, Ni1000

For sensor Pt1000 and Ni1000 use only 16bit resolution

- Voltage input 0-10VDC: input resistance 100kΩ accuracy ±0,1% measurement resolution 3mV@12bit and 1mV@16bit
- Current input 0-20mA ( external resistor 499Ω required )
- Resistive input 0-1000kΩ: measurement resolution for 20kΩ load 20Ω@12bit and 1Ω@16bit
- Dry contact input

### Digital Inputs (DI)

- Dry contact inputs
- Fast pulse counter up to 100Hz

### Analog Outputs (AO)

All analog outputs are equipped with 12-bit ADC provides 10 mV resolution and accuracy less than ±0,5%. They support the following output types:

- Output 0-10V DC maximum load up to 20mA
- PWM: 0,01Hz, 0,1Hz, 1Hz, 10Hz, 100Hz

### Digital Outputs (DO)

- Relay output (NO) max. 3A, 250V AC / 30 VDC

### Platform

- ARM Cortex-M3

### Communication

- Interface RS485 half duplex,
- 2 x Ethernet with built in switch- only version IP
- Up to 99 devices on the bus
- Protocols: Modbus or BACnet
- Baud rate: 2400 to 115200 bps

### Power supply

- 24V AC/DC

### Housing

- Dimension MIX18: 88x110x62 mm
- Dimension MIX38: 160x110x62 mm
- Construction: plastic, self-extinguishing (PC/ABS)
- DIN rail mounting DIN (DIN EN 50022 norm)
- Cooling: internal air circulation

### Environment

- Operating temperature: -10°C to 50°C
- Storage temperature: -40°C to 85°C
- Relative humidity: 5% to 95%, no condensation
- Ingress Protection Rating: IP40 – for indoor installation

	UI	DI	AO	DO	Modbus RS485	Modbus TCP/IP	Bacnet MSTP	Bacnet IP
MIX18	5	5	4	4	✓		✓	
MIX18-IP	5	5	4	4	✓	✓	✓	✓
MIX38	8	12	6	12	✓		✓	
MIX38-IP	8	12	6	12	✓	✓	✓	✓
	✓ Voltage ✓ Current ✓ Resistive ✓ Dry contact	✓ Dry contact ✓ Fast pulse counter up to 100 Hz	✓ Voltage ✓ PWM ✓ Max. load up to 20 mA	✓ Relay (NO) 3A 230VAC	✓ RTU ✓ ASCII	✓ Modbus Gateway IP/RS485	✓ Master ✓ Slave	

